

# Print your cards and badges **on demand!**

The printer that delivers personalized cards in small runs

# Tattoo<sup>2</sup>



**Tattoo2** is the ideal solution for printing single-sided cards, individually or in small runs.

**Tattoo2** is a multi-feature printer that prints texts, logos and barcodes in less than a minute, in color or monochrome, and can also encode magnetic stripes.

Designed to deliver a few hundreds of cards per year, **Tattoo2** offers an attractive quality / price ratio, and outperforms all other competing printers.

## COMPACT AND SMART



**Tattoo2** is a compact printer, with a size no larger than an A4 page. It can easily be deployed behind a counter or on a reception desk.

**Tattoo2** comes with a detachable card feeder and with a front side feeding mode to personalize cards by the unit.

## APPLICATIONS

Users who are looking for a simple and high-quality solution for their badges will adopt **Tattoo2**. Today, hundreds of small businesses, retail shops, clubs, associations, cities and schools rely on **Tattoo2** to deliver:

- Employee badges
- Membership cards for clubs and associations
- School cards
- Customer and loyalty cards
- Library cards
- Business cards
- Cards for youngsters or seniors



## BENEFITS

### ■ Simple and user-friendly

**Tattoo2** is both easy to install and easy to use. No training is necessary to run the printer.

All operations and maintenance tasks such as cleaning the printer, replacing a ribbon or reloading cards were therefore made effortless for the user.

### ■ A compact and follow-me printer

**Tattoo2** is the most compact printer in its category. Its travel case, available as an option, makes it possible to carry this light-weight printer wherever you go, and use it whenever needed.

### ■ From basic to advanced cards

From thin cards to thicker ones such as credit cards, **Tattoo2** supports all your requirements. **Tattoo2** prints on plastic when long-lasting cards are required, but also on paper when your budget is tight.

### ■ Professional options

With **Tattoo2**, you can issue professional badges, with a resolution of 300 dpi, and benefit from a TCP/IP port, available as an option. **Tattoo2** also supports multiple magnetic encoders.

**evolIS**  
card printers



# Tattoo<sup>e</sup>

## Your badges and cards made easy. Tattoo2.

### SPECIFICATIONS

- Color printing module, 300 dpi print head (11.8 dots/mm)
- USB connection (cable supplied)
- 16 MB of RAM
- Detachable feeder with a capacity of 100 cards (0.76 mm or 30 mil)
- Output hopper with a capacity of 15 cards (0.76 mm or 30 mil)
- Automated adjustment of card thickness
- Control panel with 1 button and 4 LEDs
- Cover color: Fire Red
- RoHS-compliant

### PRINTING

- Color-dye sublimation and monochrome thermal transfer
- Integrated ribbon saver for monochrome printing

### OPTIONS & ACCESSORIES

- Ethernet TCP-IP, available as an option
- Magnetic stripe encoder ISO 7811 HiCo/LoCo or JIS2
- Additional 100-card feeder
- Manual card feeder
- Travel case
- Cleaning kit

### RIBBONS

- 5-panel YMCKO color ribbon: 100 cards/roll
- Monochrome ribbons: - up to 600 cards/roll (black, red, green, blue)  
- up to 500 cards/roll (white, gold and silver)
- BlackWAX monochrome ribbon (for ABS & special varnish plastic cards): up to 600 cards/roll

### PRINTING SPEED

- Color (YMCKO): 40 sec per card
- Monochrome: 7 sec per card

### CARD LOADING

- Manual (card by card)
- Card feeder with delivery in output hopper

### CARD FORMAT

- ISO CR-80 – ISO 7810 (53.98 mm x 85.60 mm – 3.375" x 2.125")

### CARD TYPE

- All PVC, Composite PVC cards, PET, ABS<sup>1</sup> and special varnish<sup>1</sup> cards

### CARD THICKNESS

- From 0.25 mm<sup>2</sup> (10 mil) to 0.76 mm (30 mil)

### RESIDENT FONTS

- Arial 100, Arial bold 100
- Barcode: Code 39, 2/5 interlaced

### SUPPORTED PLATFORMS

- Windows™ 7, XP and Vista (32 & 64 bits)
- Drivers for Windows™ 2003 and 2000 available on demand
- Macintosh™ OS X v10.2 – 10.6
- Linux

### SOFTWARE

- eMedia Card Designer Software for designing and editing badges, **30-day free trial**  
- Compatible with Windows™ 7, XP, Server 2003 and Vista 32 & 64 bits

### INTERFACE

- USB port (cable supplied), Ethernet TCP-IP available as an option

### SIZE OF THE PRINTER

- Without output hopper: 166 mm (6.53") (H) x 290 mm (11.42") (L) x 187 mm (7.36") (W)
- With output hopper: 166 mm (6.53") (H) x 368 mm (14.49") (L) x 187 mm (7.36") (W)

### WEIGHT OF THE PRINTER

- 2.4 Kg (5.3 Lbs)

### POWER SUPPLY

- Power supply: 100-240 V AC, 50-60 Hz, 1.5 or 1.8 A
- Printer: 24 V DC, 3 A

### ENVIRONMENT

- Min/max operating temperature: 15° / 30 °C (59° / 86 °F)
- Humidity: 20% to 65% non-condensing
- Min/max storage temperature: -5° / +70 °C (23° / 158 °F)
- Storage humidity: 20% to 70% non-condensing
- Operating ventilation: free air

### WARRANTY


- 2 years (printer and print head), unlimited printouts<sup>3</sup>

<sup>1</sup> Under specific conditions.

<sup>2</sup> Specific model for thin cards (10 mil / 0.25 mm) is available on demand. Note that such cards must be used for monochrome printing only

<sup>3</sup> Warranty subject to observance of specific conditions and use of Evolis genuine consumables

© 2010 Evolis Card Printer. All rights reserved. Actual data may differ. Data, specifications and product picture may be updated without prior notification. All brands and trademarks belong to their respective holders. 04/2010. Photos by Calvez Actinic. KB-T102-53E-A

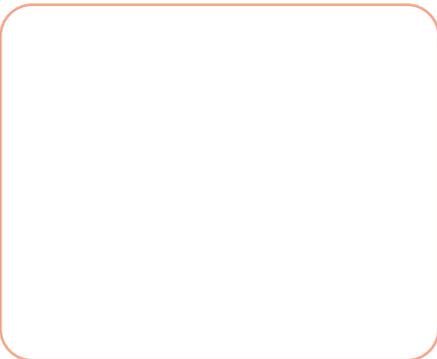

#### EUROPE, MIDDLE-EAST, AFRICA

Evolis Card Printer · 14, avenue de la Fontaine · Z.I. Angers Beaucouzé · 49070 Beaucouzé · France  
Tel: + 33 (0) 241 367 606 · Fax: + 33 (0) 241 367 612 · info@evolis.com

AMERICAS · Evolis Inc. · Fort Lauderdale · evolisinc@evolis.com

ASIA-PACIFIC · Evolis Asia Pte Ltd · Singapore · evolisasia@evolis.com

CHINA · Evolis · Sales office · Shenzhen · infochina@evolis.com

JAPAN · Evolis · Representative office · Tokyo · infojapan@evolis.com

www.evolis.com

**evolis**  
card printers